



**5DW66450**  
**Wall flue , 60 cm**  
**Stainless steel, Hipped roof design**

**Output, consumption**

- Voltage: 220 – 240 V
- Total connected load: 100 W
- Energy efficiency class: C\*
- Average power consumption: 51.4 kWh/year\*
- Fan efficiency class: E\*
- Light efficiency class: A\*
- Grease filter efficiency class: C\*
- Noise min./max. Normal level: 50/66 dB\*
- Fan output max. Normal level: 360 m³/h in extraction mode max. 360 m³/h in circulation mode max. 200 m³/h

\* According to EU Regulation No. 65/2014 / Fan capacity according to EN 61591

**Equipment / comfort**

- Stainless steel
- For wall installation above cooking zones
- Optional extraction or circulation mode (carbon filter required for circulation mode)
- 3-level fan power controllable via push buttons
- Uniform, bright lighting with 2 x 2.1 W LED lamps
- Illuminance: 104 lux
- Colour temperature: 3.500 K
- Metal grease filter, dishwasher-safe
- Including exhaust air shaft

**Optional accessories**

- 5Z5138X5: Starter set for circulation mode

**Technical data and dimensions**

- Appliance dimensions, extraction: 799-975, x 600 x 500 mm
- Appliance dimensions, circulation: 799-975 x 600 x 500 mm
- Length of connection cable (cm): 130
- „\_dimensions and installation instructions for this device in accordance with the technical drawing“

**Optional accessories:**

- 5Z5138X5: Starter set for circulation mode

**Features:**

- Color of the fireplace: stainless steel
- Type: fireplace
- Length of connection cable (cm): 130
- Height of the fireplace: 553-730 / 573-730
- Height of the unit without chimney (mm): 246
- Control: mechanical
- Regulation of power levels: 3
- Max. Fan power exhaust air operation (m³ / h): 360
- Max. Fan-circulating air operation (m³ / h): 200
- Number of lamps (pcs): 2
- Sound power (dB (A) re 1 pW): 66
- Diameter of exhaust air outlet (mm): 120/150
- Material of grease filter: aluminum
- Odor filter: no
- Type of air duct: convertible
- Optional accessories: 5Z5138X5
- Type of lamps: LED
- Type of grease filter: cassette


**Available color options:**

**Verbrauchs- und Anschlusswerte:**

- Connected load (W): 100
- Hedging (A): 10
- Voltage (V): 220-240
- Frequency (Hz): 60; 50
- Plug type: Schuko / Gardy.m. grounding
- Type of installation: Wall mounting
- Housing material: stainless steel
- Plug type: Schuko / Gardy.m. grounding
- Position of the fan: motor in the housing
- Backflow flap: no
- Length of connection cable (cm): 130
- Dimensions of the device (mm): 799-975 x 600 x 500

**Accessories:**

EAN-Nr.:4251003102109

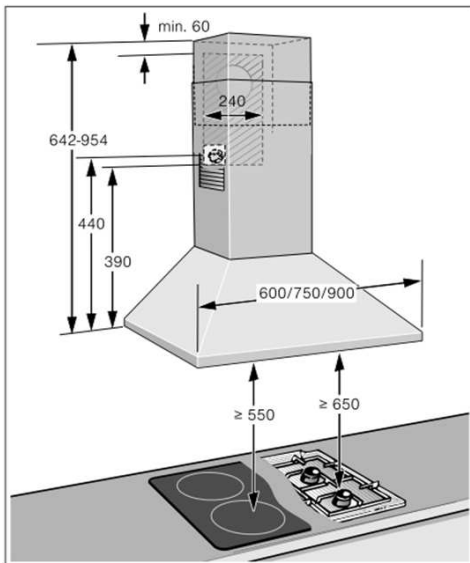

Dimensions in mm