


**EG1899 Independently controlled hob, Induction  
with integrated downdraft system**

**5IX94350**

90 cm wide

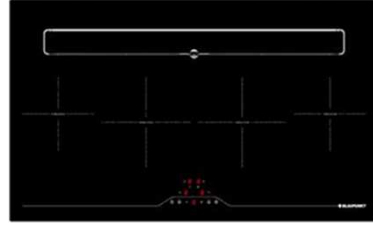

**Performance, consumption**

Voltage : 220-240 V; Total power rating: 8,8 kW  
4 induction cooking zones:  
2 cooking zone Ø 16cm, 1,2 kW ( 1,4 kW Booster)  
2 cooking zone Ø 20cm, 2,3 kW ( 3 kW Booster)

**Design,comfort**

Frameless  
touchControl; 7-segment LED display; Power setting for all induction cooking zones  
with main control for hob and maincontrol for downdraft system  
Electronic control across 10 power settings  
pot detector  
Child-safety lock  
Timer; Countdown; residual heat indication

**Dimensions H x W x D**

Appliance dimensions : 5,7 x 90 x 53 cm  
Installation dimensions : 5,7 x 87,3 x 50,2 cm

**Performance, consumption**

Voltage : 220-240V  
Total power rating : 175 W  
Energy-efficiency rating : A++  
Average energy consumption : 35 kWh/year  
Fan efficiency rating: A  
Lighting efficiency rating: ---  
Grease filter efficiency rating: B  
Min./max./noise level at normal setting and intensive setting  
Min 48,23 dB(A) Max. 66,25 dB(A) Max. 73,88 dB(A)  
with vented system (extraction) Min.320 m3/h max. 650 m3/h - Intensiv 900 m3/h  
with vented system (recirculation) Min.295 m3/h max. 850 m3/h

**Design,comfort**

Ceramic Glass Black, components inside in stainless steel  
For mounting to wall above cooking area or For mounting to the ceiling above island units  
For extraction or recirculation vented system (For recirculation vented system für charcoal filters are needed)  
6-stage fan output  
For extraction vented system ( 4 power settings + 2 intensive settings) adjustable  
using TouchControl with 7-segment LED display and LED  
For recirculation vented system 6 power settings adjustable  
using TouchControl with 7-segment LED display and LED  
2 Intensive settings with 2 automatic reset  
Automatic over-running of fan blades of 5/10 and 20 Minuten with LED display  
Grease and Charcoal filters reset key  
Cleaning message:  
After 30 hours of hood operation, the control indicate the need to clean the grease filters; this alarm prevents the  
operation of the suction system until it is reset, to allow the condensate tray to empty  
condensate tray capacity 0,75 Litre  
High air-flow rate  
Metal grease filter, suitable for dishwasher use

**Special accessories**

**SZ9103X1 - EG1899.1 : Charcoal filters (2 x needed)**